



VA-SPK

The design is ideal in open structure ceiling configurations since the speaker, terminal and switch will be hidden when the speaker is hung from the deck.

The VoiceArrest™ VA-SPK is a 25-volt system loudspeaker designed to generate the optimum masking sound for a variety of ceiling conditions. It is equipped with a 13cm (5 in.) driver installed in a sealed enclosure, which can be black or white.


The design is ideal in open structure ceiling configurations since the speaker, terminal and switch will be hidden when the speaker is hung from the deck. It can also be installed above the suspended ceiling in typical sound masking installations. A rotary switch allows quick adjustment of the output level with 8W, 4W, 2W, 1W, ½W positions available at 25V. The loudspeaker is also compatible with 70V systems with 8W, 4W adjustments available.

Specifications:

Power:	10 watts
Line Voltage:	25V and 70V
Sensitivity:	91 dB
Material:	Metal
Frequency Response:	100 Hz to 10 kHz
Connectors:	Wire and Lock-screw
Color:	White
Diameter:	196 mm (7.7 in)
Height:	122 mm (4.8 in)
Weight:	1.86 kg (4.1 lbs)
Shipping Weight:	2.3 kg (4.9 lbs)
UL Certification:	UL 204 and UL 60065 listed



Frequency Response

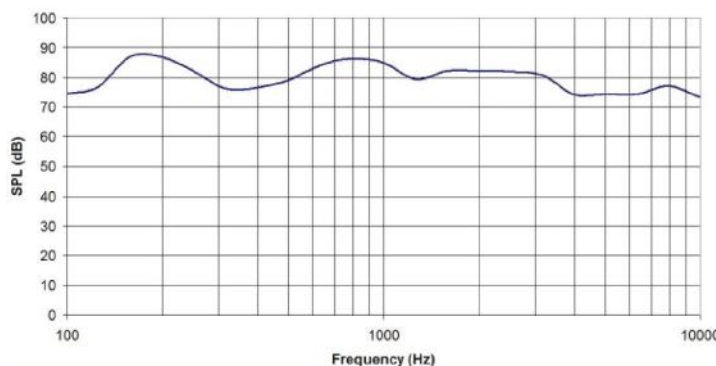

Specifications are subject to change without notice

***Tap speaker to 2W@25V**